Mira Vigour Thermostatic

Power Shower

Instant invigoration combined with thermostatic safety. Suited to a low pressure hot and cold water system

Product Information

Description	Colour	Product No.
Mira Vigour Thermostatic	White/Chrome	1.1532.353

Features & Benefits

To download other resources, and for more information and advice on our products just visit: www.mirashowers.co.uk



COLD WATER CISTERN AND HOT WATER CYLINDER

YEAR GUARANTEE

1







Product Specification

Tech Details

Temperature Control	Performance	
Control type: Thermostatic	Temperature stability: ± 2°C	
Installation	Flow rate: 14 l/min	
Supply voltage: 230v ± 10%	Safety Features	
Supply rating: 3 amp	Automatic shutdown: Yes	
Terminal Block connections: Maximum 2.5mm ²	Factory set to safe max temp: Yes	
Water entry points: Left (rising, falling & rear)	Temperature override: Yes	
Cable entry points: Left (rising, falling & rear)	Accessories	
Inlet connections: 15mm dual entry push fit. Hot and Cold, 28mm pipe centres	Wide range of accessories available at www.mirashowers.co.uk	
Outlet connections: ½" BSP Male	Approvals	
Supply Conditions (hot and cold)	CE approved	
Cold water range: Up to 25°C	BEAB approved	
Hot water range: 50°C - 65°C max (recommended)	 Kiwa certified WRAS approved (Water Regulations Advisory Scheme) 	
Minimum maintained pressure: 0.01 bar (100mm head)		
Maximum maintained pressure: 0.5 bar (5 metre head)		
Maximum static pressure: 1.0 bar (10 metre head)	BEAB Approved c e r t i f i e d SWRAS	

Dimensions

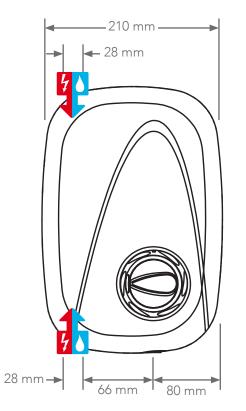

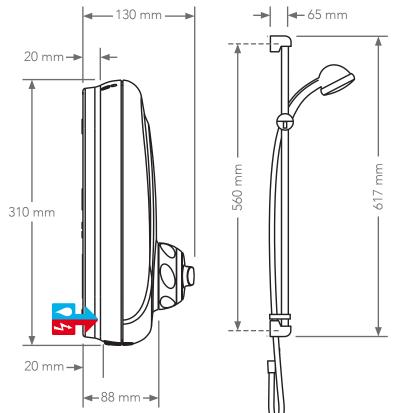

To download other resources, and for more information and advice on our products just visit: www.mirashowers.co.uk

